

单向节流阀


技术参数




规 格	6	8	10	12	16	20	25	30	40
最高工作压力 (MPa)	31.5								
最大流量 (L/min)	14	40	60	85	175	200	300	400	600
工作介质	矿物质液压油;磷酸酯液压油								
介质温度范围 (°C)	-20~70								
介质粘度范围 (mm²/s)	2.8~380								
开启压力 (MPa)	a: 0.05 b:0.4								
污 染 度	油液最高允许污染度按NAS1638第9级, 推荐过滤器过滤精度最小β ₁₀ ≥75。								

单向节流阀是节流阀和单向阀并联组成。用于在一个方向调节液体流量，反向自由回流的场合。

型号说明

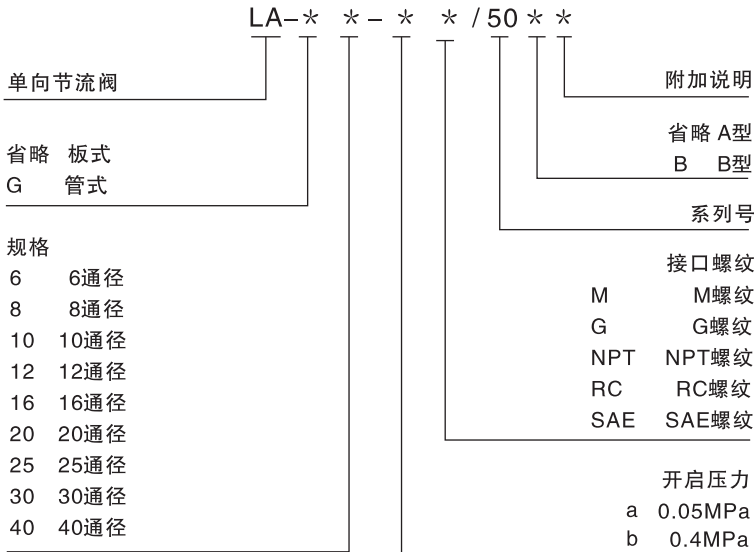


机能符号

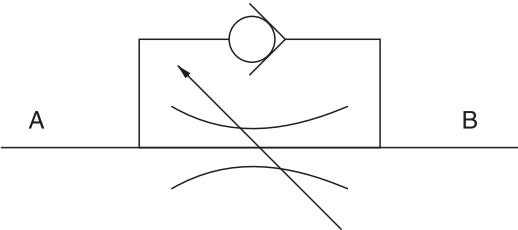

单向节流阀

外形尺寸

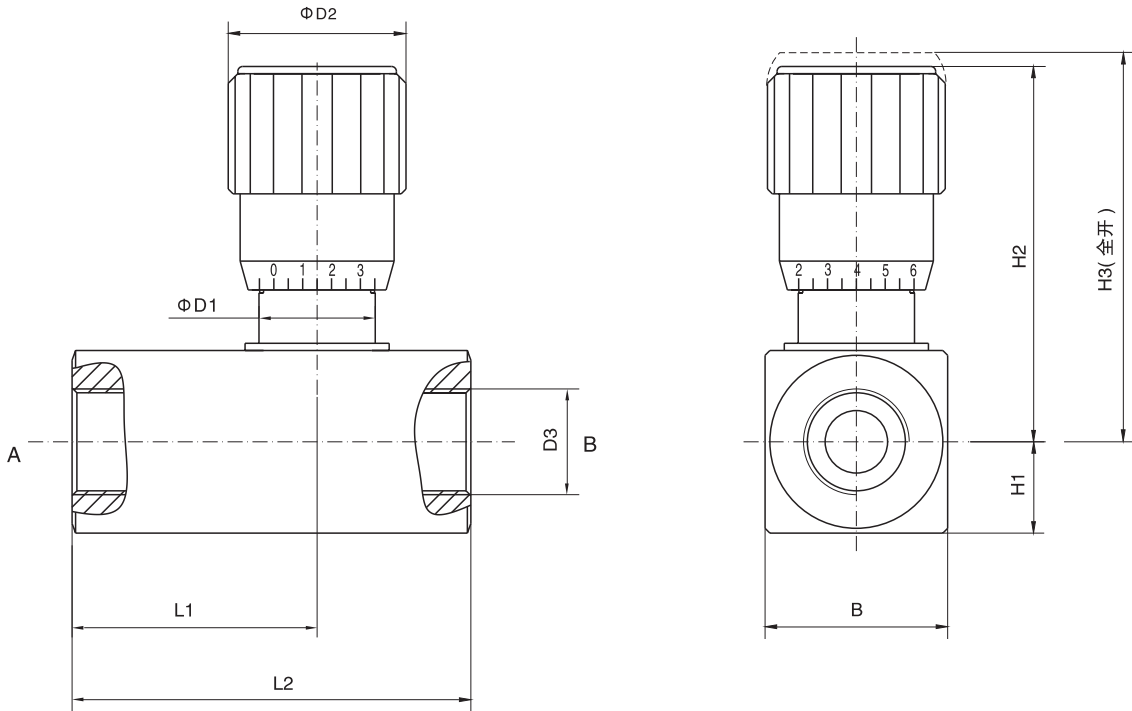

型号	B	D1	D2	D3					H1	H2	H3	L1	L2
G6	28	19.3	30	M10X1	G1/8"	NPT1/8"	Rc1/8	SAE04	14	59.3	64.8	36	58
G8	28	19.3	30	M14X1.5	G1/4"	NPT1/4"	Rc1/4	SAE04	14	61.3	67.9	39	64
G10	28	19.3	30	M18X1.5	G3/8"	NPT3/8"	Rc3/8	SAE06	14	61.5	67.5	43	70
G12	38	24.2	37	M22X1.5	G1/2"	NPT1/2"	Rc1/2	SAE08	19	78.1	86.5	52	83
G16	38	24.2	37	M27X2	G3/4"	NPT3/4"	Rc3/4	SAE12	19	78.3	86.5	55.5	89
G20	48	35	48	M33X2	G1"	NPT1"	Rc1"	SAE16	24	102.3	114.4	70.8	117
G25	60	50	48	M42X2	G1 1/4"	NPT1 1/4"	Rc1 1/4	SAE20	30	134.68	148.1	97	154
G30	70	70	80	M48X2	G1 1/2"	NPT1 1/2"	Rc1 1/2	SAE24	35	161.5	181.5	111	172
G40	90	71	80	M60X2	G2"	NPT2"	Rc2"	SAE32	45	171.5	191.5	129	190